

# Acro Star


## Additional construction notes

Fit the front pulley in the orientation shown. Look at the grub screw hole.

Use M3 x 4mm grub screw.

Lock with Loctite 242


Also note the bearings in the block face the large pulley

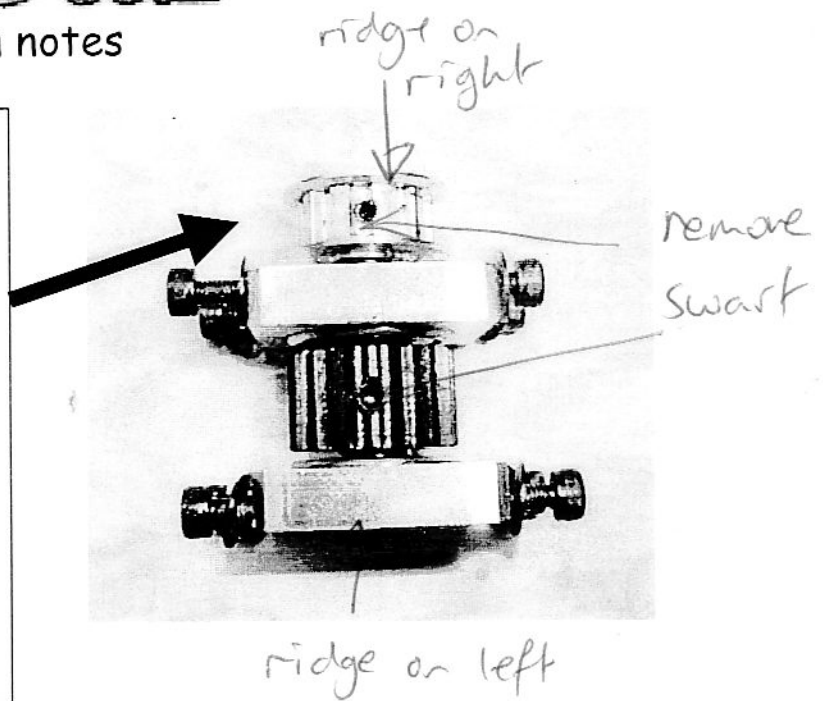

Fit the tail shaft pulley in the orientation shown. Look at the grub screw hole.

Use M3 x 6mm grub screw supplied.

Lock with Loctite 242

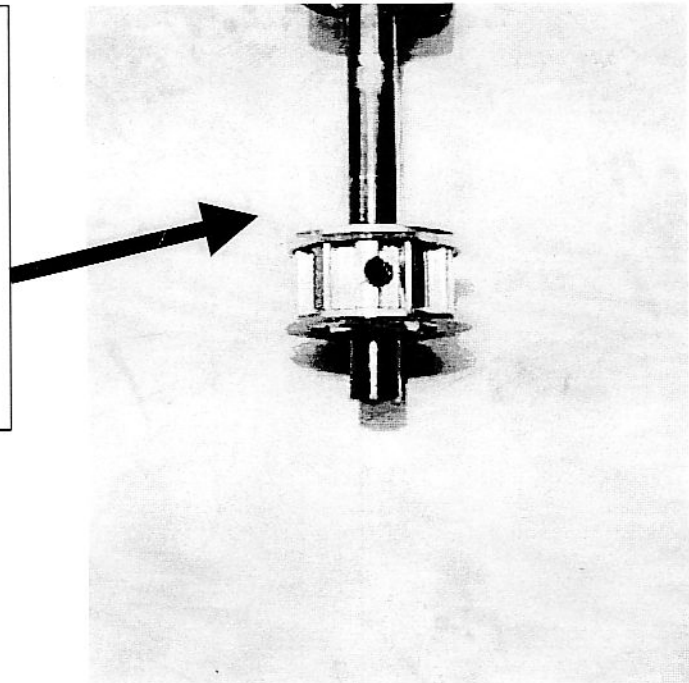


TSK UK, For all enquiries.

Tel 01344 455827 or 01322 666619

Or see the web site [WWW.TSKUK.com](http://WWW.TSKUK.com)


MAKE THE RODS UP AS BELOW  
ADJUST TO SUIT RADIO FITTED AND PERSONAL PREFERENCE

LINK A

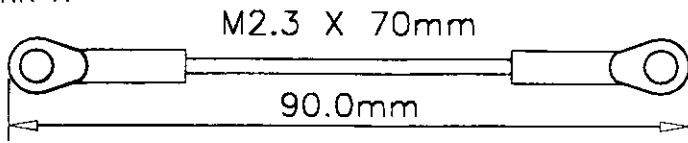


ELEVATOR SERVO TO BELLCRANK  
MAKE 2 CC

LINK B

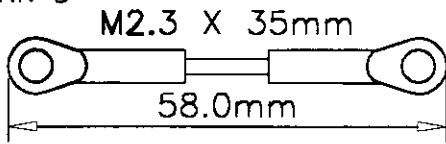


ROLL / PITCH SERVO TO BELLCRANK  
MAKE 4 CC

LINK C

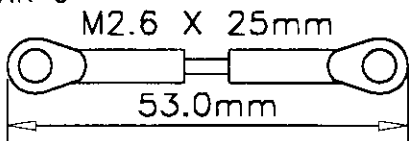


ROLL BELLCRANK TO SWASHPLATE  
MAKE 1 CC

LINK D

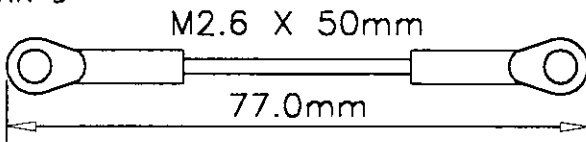


PITCH / ELEVATOR BELLCRANK TO SWASHPLATE  
MAKE 2 CC

LINK E

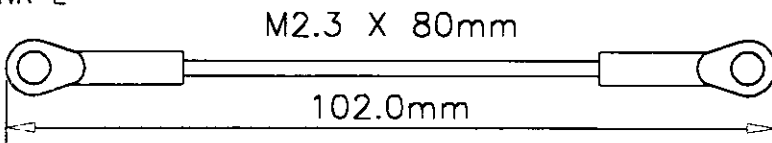


SWASHPLATE TO BLADE GRIP MIXER ARM  
MAKE 2 CC

LINK F

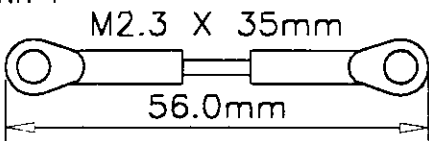


FLYBAR TO MIXING BASE  
MAKE 2 CC


LINK G

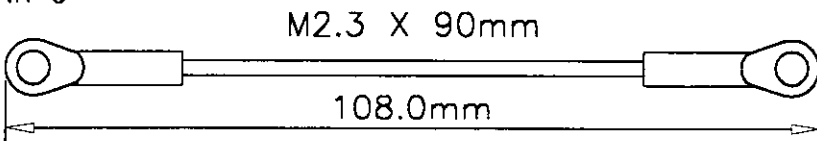

THROTTLE  
MAKE 1 CC

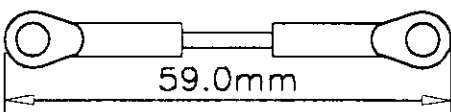

WASHOUT MIXER TO BLADE GRIP BELLCRANK  
REFERANCE FOR SERVICING EE

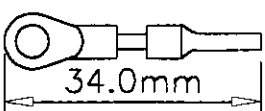

WASHOUT MIXER TO SEE SAW  
REFERANCE FOR SERVICING EE